

FIRE PROTECTION DRAWING KEYNOTES

THE STAIR DEMOLITION, GUARD RAIL INFILL, AND ASSOCIATED FIRE PROTECTION PIPING DEMOLITION SHALL BE BID AS AN ALTERNATE. REMOVE FIRE PROTECTION UNDER THE STAIR AND CAP/PLUG THE REMAINING STUB.

PLUMBING DEMOLITION LEGEND

- (EX) ITEM IS EXISTING TO REMAIN
- (X) ITEM IS EXISTING TO BE REMOVED
- (XR) ITEM IS EXISTING TO BE RELOCATED

PLUMBING DRAWING KEYNOTES

- (P1) REMOVE AND REPLACE EXISTING TRENCH DRAIN (TDX) AND ALL ASSOCIATED WASTE AND VENT PIPING. REFER TO NEW WORK PLAN.
- (P2) REMOVE AND REPLACE THE HATCHED UNDERGROUND 4" SEWER AND 2" VENT PIPING. REFER TO NEW WORK PLAN.
- (P3) REMOVE AND REPLACE EXISTING FLOOR CLEANOUT (FCOX) AND ALL ASSOCIATED WASTE PIPING.

ELECTRICAL DRAWING KEYNOTES

- (E1) EXISTING EXIT SIGN TO BE RELOCATED. REFER TO DRAWING MEPL1 FOR NEW LOCATION.
- (E2) EXISTING OVERHEAD DOOR MOTOR CIRCUITING TO BE REUSED FOR NEW OVERHEAD DOOR MOTOR. DISCONNECT AND REMOVE ALL EXISTING CONTROLS, CONDUIT AND WIRING NOT BEING REUSE.

1 UNDERGROUND /FIRST FLOOR DEMOLITION PLAN
1/8" = 1'-0"



ELECTRICAL DRAWING KEYNOTES

- (E) NEW LOCATION OF RELOCATED EXIT SIGN. EXTEND EXISTING CIRCUITING AS REQUIRED.
- (E2) CONNECT NEW OVERHEAD DOOR MOTOR TO EXISTING OVERHEAD DOOR CIRCUITING TO BE REUSED. INSTALL AND WIRE NEW OVERHEAD DOOR MOTOR CONTROLS PER MANUFACTURER'S INSTRUCTIONS. COORDINATE ALL WORK REQUIRED WITH EQUIPMENT SUPPLIER.

PLUMBING DEMOLITION LEGEND

- (EX) ITEM IS EXISTING TO REMAIN
- (X) ITEM IS EXISTING TO BE REMOVED
- (XR) ITEM IS EXISTING TO BE RELOCATED

PLUMBING DRAWING NOTES

ALL UNDERGROUND PVC PIPING SHALL BE BURIED WITH A TRACER WIRE OR METAL DETECTABLE TAPE.

PLUMBING DRAWING KEYNOTES

- (PI) PROVIDE EXCAVATION, BACKFILL AND ALL MATERIAL AND LABOR AS REQUIRED TO PROVIDE NEW TRENCH DRAIN.
- (P2) CONNECT NEW 4" SANITARY TO EXISTING SANITARY. PC TO CAMERA, LOCATE AND CHECK CONDITIONS OF EXISTING SANITARY LINE. PC TO VERIFY DEPTH OF PIPE AND ALL REQUIREMENTS IN FIELD PRIOR TO CONSTRUCTION.

1 UNDERGROUND / FIRST FLOOR PLAN
1/8" = 1'-0"

PLUMBING SYMBOLS & ABBREVIATIONS


Table with plumbing symbols and abbreviations. Includes symbols for clean-out, floor drain, shower drain, etc., and their corresponding abbreviations like CO, WCO, FCO-1, etc.

PLUMBING NOTES

- List of plumbing notes detailing installation requirements for various fixtures, piping, and equipment. Includes notes on clean-outs, floor drains, shower drains, and water supply distribution.

PLUMBING SPECIFICATIONS

GENERAL CONDITIONS AND SUPPLEMENTAL GENERAL CONDITIONS ISSUED BY THE ARCHITECT SHALL GOVERN WHERE APPLICABLE. THIS CONTRACTOR SHALL THOROUGHLY FAMILIARIZE HIMSELF WITH THE PLANS AND SHALL VERIFY EXISTING SITE CONDITIONS AT THE JOB SITE BEFORE SUBMITTING BID...

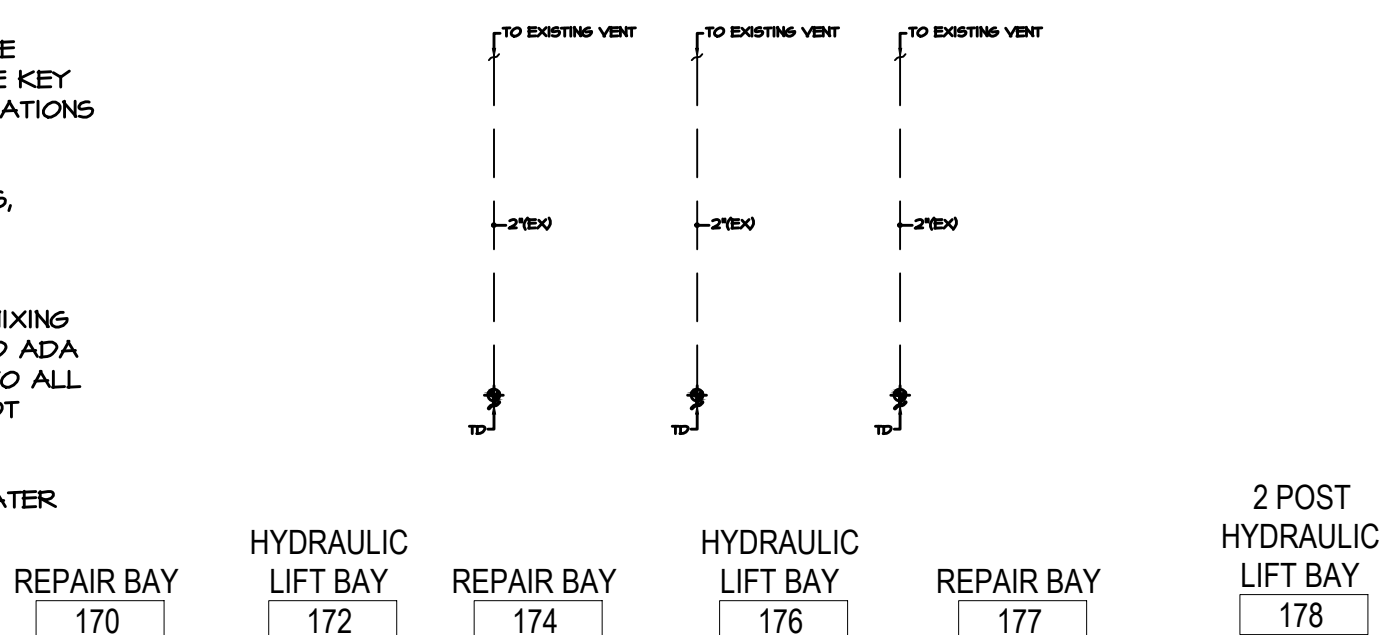

WASTE AND VENT DIAGRAM

ELECTRICAL SPECIFICATIONS

GENERAL CONDITIONS AND SUPPLEMENTAL GENERAL CONDITIONS BY THE ARCHITECT SHALL GOVERN WHERE APPLICABLE. THIS CONTRACTOR SHALL THOROUGHLY FAMILIARIZE HIMSELF WITH THE PLANS AND SHALL VERIFY EXISTING SITE CONDITIONS AT THE JOB SITE BEFORE SUBMITTING BID...

MECHANICAL SPECIFICATIONS

- List of mechanical specifications detailing requirements for ductwork, piping, equipment, and installation. Includes sections for unconditioned spaces, exterior ductwork, and ductwork dimensions.

SPRINKLER SPECIFICATIONS

GENERAL CONDITIONS AND SUPPLEMENTAL GENERAL CONDITIONS ISSUED BY THE ARCHITECT SHALL GOVERN WHERE APPLICABLE. THIS CONTRACTOR SHALL VERIFY EXISTING SITE CONDITIONS AT THE JOB SITE BEFORE SUBMITTING BID...

Project information block including FGM ARCHITECTS logo, project name 'GURNEE PUBLIC WORKS FLEET GARAGE RENOVATION PROJECT', address '1151 Kilbourne Road, Gurnee, IL 60031', and contact details for the architect and structural engineer.