

ADDENDUM NO. 1

DATE: March 17th, 2022

PROJECT: 2023 MFT Street Maintenance Program – Gurnee #8443

OWNER: VILLAGE OF GURNEE

TO: PROSPECTIVE BIDDERS

This Addendum forms a part of the Contract Documents and modifies the Bidding Documents approved for bid, with the amendments as noted below.

This Addendum consists of 12 pages. This Addendum contains the following revisions:

1. Revision to Schedule of Prices
2. Revision to Quantity Breakdown by Street
3. Revision of Special Provisions
4. Revision to Proposed Work on Cunningham Ct Bridge
5. Addition to Bridge Details

CHANGES TO THE CONTRACT DOCUMENTS AND SPECIFICATIONS:

Project Manual:

- Item 1: Remove and replace BLR 12201 Schedule of Prices in its entirety with pages 3 and 4 of this Addendum
 - Revised the unit for Item No. 39 BRIDGE SIDEWALK AND CURB REMOVAL AND REPLACEMENT to square yards (SY).
 - Revised Item Nos. 36 and 37 to BRIDGE DECK SCARIFICATION, 2" and BRIDGE DECK LATEX CONCRETE OVERLAY, 2".
- Item 2: Remove and replace pages 46, 47, 48, and 49 of the bid documents with pages 5, 6, 7, and 8 of this Addendum
 - Updated the Quantity Breakdown by Street to show changes of Item Nos. 36, 37, and 38.
- Item 3: Remove and replace page 67 of the bid documents with page 9 of this addendum.
 - Revised Special Provision No. 14 to be paid for per SQUARE YARD.
- Item 4: Remove and replace page 70 of the bid documents with page 10 of this addendum.
 - Revised the proposed work on Cunningham Ct bridge to alter the scarification and overlay depth to two (2) inches and added a note to verify this depth in the field.
- Item 5: Add page 11 and 12 of this addendum behind page 70 of the bid documents.
 - Added a staging/traffic control plan for Cunningham Ct bridge.

Signed: _____

J Benner

Jake Benner
Civil Engineer I
Village of Gurnee

ADDENDUM NO. 1

Please acknowledge receipt of this Addendum by signing below and faxing or emailing a copy of the Addendum to the Village of Gurnee, Engineering Department at (847)-599-7550 or engineering@village.gurnee.il.us. Failure to do may disqualify the Bidder.

Firm

By

Name

Title



Schedule of Prices

[Print Form](#)

[Print With Instructions](#)

[Reset Form](#)



Contractor's Name

Contractor's Address

City

State

Zip Code

Local Public Agency

County

Section Number

Village of Gurnee

Lake

23-00000-01-GM

Route(s) (Street/Road Name)

Various

Schedule for Multiple Bids

Combination Letter	Section Included in Combinations	Total
+		
-		

Schedule for Single Bid

(For complete information covering these items, see plans and specifications.)

Item Number	Items	Unit	Quantity	Unit Price	Total
1	COMB. CONC. CURB & GUTTER, TYPE B-6:12	FOOT	4185.5		
2	COMB. CONC. CURB & GUTTER, TYPE M-6:12	FOOT	2797.3		
3	COMBINATION CURB & GUTTER REMOVAL	FOOT	6982.2		
4	SIDEWALK REMOVAL	SF	9199.3		
5	P.C.C. SIDEWALK	SF	9199.3		
6	DETECTABLE WARNING TILES	EA	123		
7	P.C.C. DRIVEWAY REMOVAL AND REPLACEMENT, 6"	SY	736		
8	HMA DRIVEWAY REMOVAL AND REPLACEMENT	SY	2494		
9	HOT-MIX ASPHALT SURFACE COURSE, MIX "C", N50	TON	10830		
10	HMA BINDER COURSE, IL-19.0, N50	TON	5730		
11	BITUMINOUS MATERIAL (TACK COAT)	LB	65560		
12	LEVELING BINDER (MACHINE MET.), N50	TON	3782		
13	PAVEMENT PATCHING-CLASS D, 6-INCH	SY	6182		
14	PAVEMENT PATCHING-CLASS D, 4-INCH	SY	4597		
15	PAVEMENT PATCHING-CLASS D, 2-INCH, SPECIAL	SY	3150		
16	PAVEMENT PATCHING-CLASS D, 4-INCH, SPECIAL	SY	5500		
17	PAVEMENT PATCHING-CLASS D, 6-INCH, SPECIAL	SY	2000		
18	HOT-MIX ASPHALT SURFACE REMOVAL-(COLD MILLING)	SY	65145		
19	HOT-MIX ASPHALT PAVEMENT REMOVAL, 4-INCHES	SY	7995		
20	HOT-MIX ASPHALT PAVEMENT REMOVAL, 5-INCHES	SY	9610		
21	HOT-MIX ASPHALT PAVEMENT REMOVAL, 6-INCHES	SY	12178		
22	HOT-MIX ASPHALT SURFACE REMOVAL - BUTT JOINT	SY	1110		
23	UNSUITABLE SUBGRADE EXCAVATION, CA-1 REPLACEMENT	CY	2314		
24	UNSUITABLE SUBGRADE EXCAVATION, CA-6 REPLACEMENT	CY	771		

Local Public Agency		County	Section Number		Route(s) (Street/Road Name)	
Village of Gurnee		Lake	23-00000-01-GM		Various	
Item Number	Items		Unit	Quantity	Unit Price	Total
+25	EARTH EXCAVATION		CY	10		
+26	NON-SPECIAL WASTE DISPOSAL		CY	10		
+27	AGGREGATE BASE REPAIR		TON	1563		
+28	PREPARATION OF BASE		SY	28356		
+29	GEOTECHNICAL FABRIC FOR GROUND STABILIZATION		SY	6550		
+30	INLETS TO BE ADJUSTED		EA	201		
+31	INLETS TO BE RECONSTRUCTED		EA	1		
+32	MANHOLE TO BE ADJUSTED		EA	36		
+33	LANDSCAPING		SY	9062		
+34	GRADING AND SHAPING OF DITCHES		SY	4565		
+35	AGGREGATE FOR TEMPORARY ACCESS		TON	10		
+36	BRIDGE DECK SCARIFICATION, 2"		SY	140		
+37	BRIDGE DECK LATEX CONCRETE OVERLAY, 2"		SY	140		
+38	JOINT SEAL		FOOT	31		
+39	BRIDGE SIDEWALK AND CURB REMOVAL AND REPLACEMENT		SY	95		
+40	PVC UNDERDRAIN, 4 INCH		FOOT	275		
+41	2' INLET, TYPE-A, CLOSED LID TYPE 1		EA	3		
+42	2' INLET, TYPE-A, TYPE 8 GRATE		EA	2		
+43	PIPE CULVERT REMOVAL		FOOT	710		
+44	PIPE CULVERT, CLASS D TYPE 1 12", CMP		FOOT	710		
+45	STORM SEWER REMOVAL		FOOT	175		
+46	STORM SEWERS, CLASS B TYPE 1 12" HDPE		FOOT	165		
+47	STORM SEWERS, CLASS B TYPE 1 12" PVC SDR 26		FOOT	80		
+48	METAL FLARED END SECTIONS 12"		EA	48		
+49	THERMOPLASTIC PVMT. MARKING, 24" LINE		FOOT	742		
+50	THERMOPLASTIC PVMT. MARKING, 12" LINE		FOOT	3426		
+51	THERMOPLASTIC PVMT. MARKING, 4" LINE		FOOT	982		
+52	THERMOPLASTIC PVMT. MARKING, LETTERS & SYMBOLS		SF	10		
+53	TRAFFIC CONTROL AND PROTECTION		LS	1		
	Bidder's Total Proposal					

1. Each pay item should have a unit price and a total price.
2. If no total price is shown or if there is a discrepancy between the product of the unit price multiplied by the quantity, the unit price shall govern.
3. If a unit price is omitted, the total price will be divided by the quantity in order to establish a unit price.
4. A bid may be declared unacceptable if neither a unit price or total price is shown.

ITEM	PAY ITEM	UNIT	TOTAL AMOUNT	Covenant Ct	Lexington Sq	Concord Sq	Grandville Ave	Waveland Ave	Addele Dr	Cascade Way
1	COMB. CONC. CURB & GUTTER, TYPE B-6:12	FOOT	4185.5	0	0	0	433.4	91.3	0	110
2	COMB. CONC. CURB & GUTTER, TYPE M-6:12	FOOT	2797.3	193.6	302.5	232.1	0	0	177.1	0
3	COMBINATION CURB & GUTTER REMOVAL	FOOT	6982.8	193.6	302.5	232.1	433.4	91.3	177.1	110
4	SIDEWALK REMOVAL	S.F.	9199.3	393.8	198	220	44	543.4	561	220
5	P.C.C. SIDEWALK	S.F.	9199.3	393.8	198	220	44	543.4	561	220
6	DETECTABLE WARNING TILES	EA	123	4	7	7	0	7	2	6
7	P.C.C. DRIVEWAY REMOVAL AND REPLACEMENT, 6"	S.Y.	736	10	15	10	50	10	5	5
8	HMA DRIVEWAY REMOVAL AND REPLACEMENT	S.Y.	2494	64	90	100	145	200	70	50
9	HOT-MIX ASPHALT SURFACE COURSE, MIX "C", N50	TON	10840	226	444	448	307	667	400	433
10	HMA BINDER COURSE, IL-19.0, N50	TON	5730	0	0	0	510	1334	0	0
11	BITUMINOUS MATERIAL (TACK COAT)	LB	65560	1330	2610	2630	2400	3900	2300	2600
12	LEVELING BINDER (MACHINE MET.), N50	TON	3782	113	222	224	0	0	200	217
13	PAVEMENT PATCHING-CLASS D, 6-INCH	S.Y.	6182	246	200	273	0	0	107	270
14	PAVEMENT PATCHING-CLASS D, 4-INCH	S.Y.	4597	246	185	700	0	0	300	270
15	PAVEMENT PATCHING-CLASS D, 2-INCH, SPECIAL	S.Y.	3150	0	0	0	0	0	0	0
16	PAVEMENT PATCHING-CLASS D, 4-INCH, SPECIAL	S.Y.	5500	0	0	0	0	0	0	0
17	PAVEMENT PATCHING-CLASS D, 6-INCH, SPECIAL	S.Y.	2000	0	0	0	0	0	0	0
18	HOT-MIX ASPHALT SURFACE REMOVAL-(COLD MILLING)	S.Y.	65145	1935	3790	3830	0	0	3325	3700
19	HOT-MIX ASPHALT PAVEMENT REMOVAL, 4-INCHES	S.Y.	7995	0	0	0	3460	0	0	0
20	HOT-MIX ASPHALT PAVEMENT REMOVAL, 5-INCHES	S.Y.	9610	0	0	0	0	0	0	0
21	HOT-MIX ASPHALT PAVEMENT REMOVAL, 6-INCHES	S.Y.	12178	0	0	0	0	5650	0	0
22	HOT-MIX ASPHALT SURFACE REMOVAL - BUTT JOINT	S.Y.	1110	30	60	60	90	150	120	60
23	UNSUITABLE SUBGRADE EXCAVATION, CA-1 REPLACEMENT	C.Y.	2314	0	0	0	260	484	0	0
24	UNSUITABLE SUBGRADE EXCAVATION, CA-6 REPLACEMENT	C.Y.	771	0	0	0	85	162	0	0
25	EARTH EXCAVATION	C.Y.	10	0	0	0	0	0	0	0
26	NON-SPECIAL WASTE DISPOSAL	C.Y.	10	0	0	0	0	0	0	0
27	AGGREGATE BASE REPAIR	TON	1563	0	0	0	195	319	0	0
28	PREPARATION OF BASE	S.Y.	28356	0	0	0	3550	5800	0	0
29	GEOTECHNICAL FABRIC FOR GROUND STABILIZATION	S.Y.	6550	0	0	0	780	1450	0	0
30	INLETS TO BE ADJUSTED	EA	201	6	13	11	8	5	7	3
31	INLETS TO BE RECONSTRUCTED	EA	1	0	0	0	0	0	0	0
32	MANHOLE TO BE ADJUSTED	EA	36	2	0	2	2	8	5	0
33	LANDSCAPING	S.Y.	9062	60	107	85	700	3000	100	35
34	GRADING AND SHAPING OF DITCHES	S.Y.	4565	0	0	0	300	2000	0	0
35	AGGREGATE FOR TEMPORARY ACCESS	TON	10	0	0	0	0	0	0	0
36	BRIDGE DECK SCARIFICATION, 2"	S.Y.	140	0	0	0	0	0	0	0
37	BRIDGE DECK LATEX CONCRETE OVERLAY, 2"	S.Y.	140	0	0	0	0	0	0	0
38	JOINT SEAL	FOOT	31	0	0	0	0	0	0	0
39	BRIDGE SIDEWALK AND CURB REMOVAL AND REPLACEMENT	S.Y.	95	0	0	0	0	0	0	0
40	PVC UNDERDRAIN, 4 INCH	FOOT	275	0	0	0	0	0	0	0
41	2" INLET, TYPE-A, CLOSED LID TYPE 1	EA	3	0	0	0	0	0	0	0
42	2" INLET, TYPE-A, TYPE 8 GRATE	EA	2	0	0	0	0	1	0	0
43	PIPE CULVERT REMOVAL	FOOT	710	0	0	0	80	360	0	0
44	PIPE CULVERT, CLASS D TYPE 1 12" , CMP	FOOT	710	0	0	0	80	360	0	0
45	STORM SEWER REMOVAL	FOOT	175	0	0	0	0	175	0	0
46	STORM SEWERS, CLASS B TYPE 1 12" HDPE	FOOT	165	0	0	0	0	165	0	0
47	STORM SEWERS, CLASS B TYPE 1 12" PVC SDR 26	FOOT	80	0	0	0	0	80	0	0
48	METAL FLARED END SECTIONS 12"	EA	48	0	0	0	6	24	0	0
49	THERMOPLASTIC PVM.T. MARKING, 24" LINE	FOOT	742	12	24	24	89	120	15	0
50	THERMOPLASTIC PVM.T. MARKING, 12" LINE	FOOT	3426	48	120	12	96	0	48	0
51	THERMOPLASTIC PVM.T. MARKING, 4" LINE	FOOT	982	0	0	0	982	0	0	0
52	THERMOPLASTIC PVM.T. MARKING, LETTERS & SYMBOLS	S.F.	10	0	0	0	10	0	0	0
53	TRAFFIC CONTROL AND PROTECTION	L.S.	1	0	0	0	0	0	0	0

ITEM	PAY ITEM	UNIT	TOTAL AMOUNT	Strawberry Fields	Abbey Rd	Aster Dr	Penny Ln	Spinney Run Dr	Brian Ct	Kristin Ct	Chesley Ct	Harper Ave
1	COMB. CONC. CURB & GUTTER, TYPE B-6:12	FOOT	4185.5	226.6	85.8	95.7	172.7	0	0	0	0	52.8
2	COMB. CONC. CURB & GUTTER, TYPE M-6:12	FOOT	2797.3	0	0	0	0	107.8	92.4	62.7	57.2	0
3	COMBINATION CURB & GUTTER REMOVAL	FOOT	6982.8	226.6	85.8	95.7	172.7	107.8	92.4	62.7	57.2	52.8
4	SIDEWALK REMOVAL	S.F.	9199.3	308	132	231	445.5	433.4	55	110	0	132
5	P.C.C. SIDEWALK	S.F.	9199.3	308	132	231	445.5	433.4	55	110	0	132
6	DETECTABLE WARNING TILES	EA	123	0	5	4	2	3	1	1	0	8
7	P.C.C. DRIVEWAY REMOVAL AND REPLACEMENT, 6"	S.Y.	736	8	4	4	0	0	0	0	0	10
8	HMA DRIVEWAY REMOVAL AND REPLACEMENT	S.Y.	2494	55	40	60	65	0	50	60	30	150
9	HOT-MIX ASPHALT SURFACE COURSE, MIX "C", N50	TON	10830	244	150	312	276	204	108	174	106	568
10	HMA BINDER COURSE, IL-19.0, N50	TON	5730	406	250	0	0	0	0	0	0	853
11	BITUMINOUS MATERIAL (TACK COAT)	LB	65560	1900	1200	1830	1620	1200	630	1000	620	3300
12	LEVELING BINDER (MACHINE MET.), N50	TON	3782	0	0	156	138	102	54	85	53	0
13	PAVEMENT PATCHING-CLASS D, 6-INCH	S.Y.	6182	0	0	200	125	0	0	0	0	0
14	PAVEMENT PATCHING-CLASS D, 4-INCH, SPECIAL	S.Y.	4597	0	0	400	200	352	186	300	183	0
15	PAVEMENT PATCHING-CLASS D, 2-INCH, SPECIAL	S.Y.	3150	0	0	0	0	0	0	0	0	0
16	PAVEMENT PATCHING-CLASS D, 4-INCH, SPECIAL	S.Y.	5500	0	0	0	0	0	0	0	0	0
17	HOT-MIX ASPHALT SURFACE REMOVAL-(COLD MILLING)	S.Y.	2000	0	0	0	0	0	0	0	0	0
18	HOT-MIX ASPHALT PAVEMENT REMOVAL, 4-INCHES	S.Y.	65145	2820	1715	0	0	1760	930	1500	915	0
19	HOT-MIX ASPHALT PAVEMENT REMOVAL, 5-INCHES	S.Y.	7995	0	0	0	0	0	0	0	0	0
20	HOT-MIX ASPHALT PAVEMENT REMOVAL, 6-INCHES	S.Y.	9610	0	0	0	0	0	0	0	0	4820
21	HOT-MIX ASPHALT PAVEMENT REMOVAL - BUTT JOINT	S.Y.	12178	0	0	0	0	0	0	0	0	0
22	HOT-MIX ASPHALT SURFACE REMOVAL - BUTT JOINT	S.Y.	1110	0	0	30	0	0	0	0	0	120
23	UNSATURABLE SUBGRADE EXCAVATION, CA-1 REPLACEMENT	C.Y.	2314	188	113	0	0	0	0	0	0	427
24	UNSATURABLE SUBGRADE EXCAVATION, CA-6 REPLACEMENT	C.Y.	771	63	38	0	0	0	0	0	0	143
25	EARTH EXCAVATION	C.Y.	10	0	0	0	0	0	0	0	0	0
26	NON-SPECIAL WASTE DISPOSAL	C.Y.	10	0	0	0	0	0	0	0	0	0
27	AGGREGATE BASE REPAIR	TON	1563	155	95	0	0	0	0	0	0	272
28	PREPARATION OF BASE	S.Y.	28356	2820	1715	0	0	0	0	0	0	4940
29	GEOTECHNICAL FABRIC FOR GROUND STABILIZATION	S.Y.	6550	564	340	0	0	0	0	0	0	1280
30	INLETS TO BE ADJUSTED	EA	201	7	4	7	9	2	1	3	1	0
31	INLETS TO BE RECONSTRUCTED	EA	1	0	0	0	0	0	0	0	0	0
32	MANHOLE TO BE ADJUSTED	EA	36	0	0	0	0	1	1	1	0	0
33	LANDSCAPING	S.Y.	9062	58	25	42	60	40	20	20	10	3000
34	GRADING AND SHAPING OF DITCHES	S.Y.	4565	0	0	0	0	0	0	0	0	2000
35	AGGREGATE FOR TEMPORARY ACCESS	TON	10	0	0	0	0	0	0	0	0	0
36	BRIDGE DECK SCARIFICATION, 2.25"	S.Y.	140	0	0	0	0	0	0	0	0	0
37	BRIDGE DECK LATEX CONCRETE OVERLAY, 2.25"	S.Y.	140	0	0	0	0	0	0	0	0	0
38	JOINT SEAL	FOOT	31	0	0	0	0	0	0	0	0	0
39	BRIDGE SIDEWALK AND CURB REMOVAL AND REPLACEMENT	S.F.	95	0	0	0	0	0	0	0	0	0
40	PVC UNDERDRAIN, 4 INCH	FOOT	275	0	0	0	0	270	0	0	0	0
41	2' INLET, TYPE-A, CLOSED LID TYPE 1	EA	3	0	0	0	0	2	0	0	0	0
42	2' INLET, TYPE-A, TYPE 8 GRATE	EA	2	0	0	0	0	1	0	0	0	0
43	PIPE CULVERT REMOVAL	FOOT	710	0	0	0	0	0	0	0	0	150
44	PIPE CULVERT, CLASS D TYPE 1 12", CMP	FOOT	710	0	0	0	0	0	0	0	0	150
45	STORM SEWER REMOVAL	FOOT	175	0	0	0	0	0	0	0	0	0
46	STORM SEWERS, CLASS B TYPE 1 12" HDPE	FOOT	165	0	0	0	0	0	0	0	0	0
47	STORM SEWERS, CLASS B TYPE 1 12" PVC SDR 26	FOOT	80	0	0	0	0	0	0	0	0	0
48	METAL FLARED END SECTIONS 12"	EA	48	0	0	0	0	0	0	0	0	0
49	THERMOPLASTIC PAVT. MARKING, 24" LINE	FOOT	742	15	26	15	28	0	0	0	0	10
50	THERMOPLASTIC PAVT. MARKING, 12" LINE	FOOT	3426	72	144	72	144	108	60	0	0	72
51	THERMOPLASTIC PAVT. MARKING, 4" LINE	FOOT	982	0	0	0	0	0	0	0	0	216
52	THERMOPLASTIC PAVT. MARKING, LETTERS & SYMBOLS	S.F.	10	0	0	0	0	0	0	0	0	0
53	TRAFFIC CONTROL AND PROTECTION	L.S.	1	0	0	0	0	0	0	0	0	0

ITEM	PAY ITEM	UNIT	TOTAL AMOUNT	Woodlawn Ave	Magnolia Ave	Greystone Dr	Nursery Dr	Sawyer Ct	Sutton Pl	Sycamor Ln	Acacia Ct
1	COMB. CONC. CURB & GUTTER, TYPE B-6:12	FOOT	4185.5	0	0	490.6	464.2	217.8	39.6	0	0
2	COMB. CONC. CURB & GUTTER, TYPE M-6:12	FOOT	2797.3	0	0	0	0	0	0	140.8	74.8
3	COMBINATION CURB & GUTTER REMOVAL	FOOT	6982.8	0	0	490.6	464.2	217.8	39.6	140.8	74.8
4	SIDEWALK REMOVAL	S.F.	9199.3	110	0	517	1048.3	198	110	176	71.5
5	P.C.C. SIDEWALK	S.F.	9199.3	110	0	517	1048.3	198	110	176	71.5
6	DETECTABLE WARNING TILES	EA	123	2	0	20	6	0	0	2	2
7	P.C.C. DRIVEWAY REMOVAL AND REPLACEMENT, 6"	S.Y.	736	5	0	150	125	45	35	0	0
8	HMA DRIVEWAY REMOVAL AND REPLACEMENT	S.Y.	2494	45	35	150	125	45	35	25	30
9	HOT-MIX ASPHALT SURFACE COURSE, MIX "C", N50	TON	10830	150	182	828	592	128	230	81	108
10	HMA BINDER COURSE, IL-19.0, N50	TON	5730	225	273	0	0	0	345	161	217
11	BITUMINOUS MATERIAL (TACK COAT)	LB	65560	900	1100	4900	3470	750	1350	470	640
12	LEVELING BINDER (MACHINE MET.), N50	TON	3782	0	0	414	296	64	0	0	0
13	PAVEMENT PATCHING-CLASS D, 6-INCH	S.Y.	6182	0	0	1560	1038	178	0	0	0
14	PAVEMENT PATCHING-CLASS D, 4-INCH	S.Y.	4597	0	0	0	0	0	0	0	0
15	PAVEMENT PATCHING-CLASS D, 2-INCH, SPECIAL	S.Y.	3150	0	0	0	0	0	0	0	0
16	PAVEMENT PATCHING-CLASS D, 4-INCH, SPECIAL	S.Y.	5500	0	0	0	0	0	0	0	0
17	PAVEMENT PATCHING-CLASS D, 6-INCH, SPECIAL	S.Y.	2000	0	0	0	0	0	0	0	0
18	HOT-MIX ASPHALT SURFACE REMOVAL-(COLD MILLING)	S.Y.	65145	0	0	7200	5080	1110	0	0	0
19	HOT-MIX ASPHALT PAVEMENT REMOVAL, 4-INCHES	S.Y.	7995	0	0	0	0	0	0	0	0
20	HOT-MIX ASPHALT PAVEMENT REMOVAL, 5-INCHES	S.Y.	9610	1210	1580	0	0	0	2000	0	0
21	HOT-MIX ASPHALT PAVEMENT REMOVAL, 6-INCHES	S.Y.	12178	0	0	0	0	0	0	670	910
22	HOT-MIX ASPHALT SURFACE REMOVAL - BUTT JOINT	S.Y.	1110	90	0	0	60	0	0	30	30
23	UNSUITABLE SUBGRADE EXCAVATION, CA-1 REPLACEMENT	C.Y.	2314	109	132	0	0	0	133	47	63
24	UNSUITABLE SUBGRADE EXCAVATION, CA-6 REPLACEMENT	C.Y.	771	36	44	0	0	0	44	16	21
25	EARTH EXCAVATION	C.Y.	10	0	0	0	0	0	0	0	0
26	NON-SPECIAL WASTE DISPOSAL	C.Y.	10	0	0	0	0	0	0	0	0
27	AGGREGATE BASE REPAIR	TON	1563	72	87	0	0	0	0	39	52
28	PREPARATION OF BASE	S.Y.	28356	1300	1580	0	0	0	0	700	943
29	GEOTECHNICAL FABRIC FOR GROUND STABILIZATION	S.Y.	6550	325	395	0	0	0	0	140	190
30	INLETS TO BE ADJUSTED	EA	201	0	0	17	15	0	2	2	2
31	INLETS TO BE RECONSTRUCTED	EA	1	0	0	0	0	0	0	0	0
32	MANHOLE TO BE ADJUSTED	EA	36	1	0	0	0	0	0	0	0
33	LANDSCAPING	S.Y.	9062	300	320	115	100	35	20	25	20
34	GRADING AND SHAPING OF DITCHES	S.Y.	4555	120	120	0	25	0	0	0	0
35	AGGREGATE FOR TEMPORARY ACCESS	TON	10	0	0	0	0	0	0	0	0
36	BRIDGE DECK SCARIFICATION, 2.25"	S.Y.	140	0	0	0	0	0	0	0	0
37	BRIDGE DECK LATEX CONCRETE OVERLAY, 2.25"	S.Y.	140	0	0	0	0	0	0	0	0
38	JOINT SEAL	FOOT	31	0	0	0	0	0	0	0	0
39	BRIDGE SIDEWALK AND CURB REMOVAL AND REPLACEMENT	S.F.	95	0	0	0	0	0	0	0	0
40	PVC UNDERDRAIN, 4 INCH	FOOT	275	0	0	0	0	0	0	0	0
41	2' INLET, TYPE-A, CLOSED LID TYPE 1	EA	3	0	0	0	0	0	0	0	0
42	2' INLET, TYPE-A, TYPE 8 GRATE	EA	2	0	0	0	0	0	0	0	0
43	PIPE CULVERT REMOVAL	FOOT	710	90	30	0	0	0	0	0	0
44	PIPE CULVERT, CLASS D TYPE 1 12", CMP	FOOT	710	90	30	0	0	0	0	0	0
45	STORM SEWER REMOVAL	FOOT	175	0	0	0	0	0	0	0	0
46	STORM SEWERS, CLASS B TYPE 1 12" HDPE	FOOT	165	0	0	0	0	0	0	0	0
47	STORM SEWERS, CLASS B TYPE 1 12" PVC SDR 26	FOOT	80	0	0	0	0	0	0	0	0
48	METAL FLARED END SECTIONS 12"	EA	48	6	2	0	0	0	0	0	0
49	THERMOPLASTIC PYMT. MARKING, 24" LINE	FOOT	742	12	0	30	50	15	15	0	15
50	THERMOPLASTIC PYMT. MARKING, 12" LINE	FOOT	3426	48	0	270	480	60	60	72	72
51	THERMOPLASTIC PYMT. MARKING, 4" LINE	FOOT	982	0	0	0	0	0	0	0	0
52	THERMOPLASTIC PYMT. MARKING, LETTERS & SYMBOLS	S.F.	10	0	0	0	0	0	0	0	0
53	TRAFFIC CONTROL AND PROTECTION	L.S.	1	0	0	0	0	0	0	0	0

ITEM	PAY ITEM	UNIT	TOTAL AMOUNT	Hollyhock Ct	Alder Ct	Suffolk Ct	Delaware Ave	Yew Ct	Monterey Ct	Acorn Ct	Prescott Ln	Old Walnut Cir
1	COMB. CONC. CURB & GUTTER, TYPE B-6:12	FOOT	4185.5	0	0	0	0	0	220	110	220	660
2	COMB. CONC. CURB & GUTTER, TYPE M-6:12	FOOT	2797.3	118.8	83.6	177.1	976.8	0	0	0	0	495
3	COMBINATION CURB & GUTTER REMOVAL	FOOT	6982.8	118.8	83.6	177.1	976.8	220	110	220	660	495
4	SIDEWALK REMOVAL	S.F.	9199.3	269.5	88	242	482.9	132	132	220	825	550
5	P.C.C. SIDEWALK	S.F.	9199.3	269.5	88	242	482.9	132	132	220	825	550
6	DETECTABLE WARNING TILES	EA	123	2	2	2	9	2	2	4	8	5
7	P.C.C. DRIVEWAY REMOVAL AND REPLACEMENT, 6"	S.Y.	736	0	5	75	0	50	25	0	50	10
8	HMA DRIVEWAY REMOVAL AND REPLACEMENT	S.Y.	2494	50	25	2494	0	200	50	50	200	150
9	HOT-MIX ASPHALT SURFACE COURSE, MIX "C", N50	TON	10830	177	85	300	792	106	89	120	1070	725
10	HMA BINDER COURSE, IL-19.0, N50	TON	5730	354	170	0	0	215	177	240	0	0
11	BITUMINOUS MATERIAL (TACK COAT)	LB	65560	1040	500	1760	4650	700	550	710	6500	4500
12	LEVELING BINDER (MACHINE MET.), N50	TON	3782	0	0	150	396	0	0	0	535	363
13	PAVEMENT PATCHING-CLASS D, 6-INCH	S.Y.	6182	0	0	285	0	0	0	0	1000	700
14	PAVEMENT PATCHING-CLASS D, 4-INCH	S.Y.	4597	0	0	285	990	0	0	0	0	0
15	PAVEMENT PATCHING-CLASS D, 2-INCH, SPECIAL	S.Y.	3150	0	0	0	0	0	0	0	0	0
16	PAVEMENT PATCHING-CLASS D, 4-INCH, SPECIAL	S.Y.	5500	0	0	0	0	0	0	0	0	0
17	PAVEMENT PATCHING-CLASS D, 6-INCH, SPECIAL	S.Y.	2000	0	0	0	0	0	0	0	0	0
18	HOT-MIX ASPHALT SURFACE REMOVAL-(COLD MILLING)	S.Y.	65145	0	0	2570	6820	0	0	0	9300	6300
19	HOT-MIX ASPHALT PAVEMENT REMOVAL, 4-INCHES	S.Y.	7995	0	0	0	0	0	0	0	0	0
20	HOT-MIX ASPHALT PAVEMENT REMOVAL, 5-INCHES	S.Y.	9610	0	0	0	0	0	0	0	0	0
21	HOT-MIX ASPHALT PAVEMENT REMOVAL, 6-INCHES	S.Y.	12178	1508	710	0	0	924	766	1040	0	0
22	HOT-MIX ASPHALT SURFACE REMOVAL - BUTT JOINT	S.Y.	1110	30	30	30	60	0	0	0	0	30
23	UNUSABLE SUBGRADE EXCAVATION, CA-1 REPLACEMENT	C.Y.	2314	103	50	0	0	60	60	85	0	0
24	UNUSABLE SUBGRADE EXCAVATION, CA-6 REPLACEMENT	C.Y.	771	34	17	0	0	20	20	28	0	0
25	EARTH EXCAVATION	C.Y.	10	0	0	0	0	0	0	0	0	0
26	NON-SPECIAL WASTE DISPOSAL	C.Y.	10	0	0	0	0	0	0	0	0	0
27	AGGREGATE BASE REPAIR	TON	1563	85	41	0	0	51	42	58	0	0
28	PREPARATION OF BASE	S.Y.	28356	1538	740	0	0	924	766	1040	0	0
29	GEOTECHNICAL FABRIC FOR GROUND STABILIZATION	S.Y.	6550	308	148	0	0	190	190	250	0	0
30	INLETS TO BE ADJUSTED	EA	201	2	2	6	21	4	1	3	15	22
31	INLETS TO BE RECONSTRUCTED	EA	1	0	0	0	0	0	0	0	0	0
32	MANHOLE TO BE ADJUSTED	EA	36	3	0	0	1	0	0	0	0	0
33	LANDSCAPING	S.Y.	9062	30	20	70	185	35	35	40	200	150
34	GRADING AND SHAPING OF DITCHES	S.Y.	4565	0	0	0	0	0	0	0	0	0
35	AGGREGATE FOR TEMPORARY ACCESS	TON	10	0	0	0	0	0	0	0	0	0
36	BRIDGE DECK SCARIFICATION, 2.25"	S.Y.	140	0	0	0	0	0	0	0	0	0
37	BRIDGE DECK LATEX CONCRETE OVERLAY, 2.25"	S.Y.	140	0	0	0	0	0	0	0	0	0
38	JOINT SEAL	FOOT	31	0	0	0	0	0	0	0	0	0
39	BRIDGE SIDEWALK AND CURB REMOVAL AND REPLACEMENT	S.F.	95	0	0	0	0	0	0	0	0	0
40	PVC UNDERDRAIN, 4 INCH	FOOT	275	0	0	0	0	0	0	0	0	0
41	2" INLET, TYPE-A, CLOSED LID TYPE 1	EA	3	0	0	0	0	0	0	0	0	0
42	2" INLET, TYPE-A, TYPE 8 GRATE	EA	2	0	0	0	0	0	0	0	0	0
43	PIPE CULVERT REMOVAL	FOOT	710	0	0	0	0	0	0	0	0	0
44	PIPE CULVERT, CLASS D TYPE 1 12", CMP	FOOT	710	0	0	0	0	0	0	0	0	0
45	STORM SEWER REMOVAL	FOOT	175	0	0	0	0	0	0	0	0	0
46	STORM SEWERS, CLASS B TYPE 1 12" HDPE	FOOT	165	0	0	0	0	0	0	0	0	0
47	STORM SEWERS, CLASS B TYPE 1 12" PVC SDR 26	FOOT	80	0	0	0	0	0	0	0	0	0
48	METAL FLARED END SECTIONS 12"	EA	48	0	0	0	0	0	0	0	0	0
49	THERMOPLASTIC PVMT. MARKING, 24" LINE	FOOT	742	15	15	0	45	15	15	15	30	15
50	THERMOPLASTIC PVMT. MARKING, 12" LINE	FOOT	3426	72	72	0	360	72	72	72	144	360
51	THERMOPLASTIC PVMT. MARKING, 4" LINE	FOOT	982	0	0	0	0	0	0	0	0	0
52	THERMOPLASTIC PVMT. MARKING, LETTERS & SYMBOLS	S.F.	10	0	0	0	0	0	0	0	0	0
53	TRAFFIC CONTROL AND PROTECTION	L.S.	1	0	0	0	0	0	0	0	0	0

project which includes cast-in-place concrete items. The concrete washout shall be constructed, maintained and removed per the approval of the Engineer. Concrete washout facilities shall be required on all projects regardless of the need for NPDES permitting. On projects requiring NPDES permitting, concrete washout facilities shall also be addressed in the SWPPP.

The concrete washout facility shall be constructed on the job site according to LC4202. The Contractor may elect to use a pre-fabricated portable concrete washout structure. The Contractor shall submit a plan for the concrete washout facility to the Engineer for approval a minimum of 10 calendar days before the first concrete pour. The working concrete washout facility shall be in place before any delivery of concrete to the site. The Contractor shall ensure that all concrete washout activities are limited to the designated area.

The concrete washout facility shall be located no closer than 50 feet from any environmentally sensitive areas, such as water bodies, wetlands, and/or other areas indicated on the plans. Adequate signage shall be placed at the washout facility and elsewhere as necessary to clearly indicate the location of the concrete washout facility to operator of concrete trucks.

The concrete washout facility shall be adequately sized to fully contain the concrete washout needs of the project. The contents of the concrete washout facility shall not exceed 75% of the facility capacity. Once the 75% capacity is reached, concrete placement shall be discontinued until the facility is cleaned out. Hardened concrete shall be removed and properly disposed of by the Contractor. The Contractor shall remove the concrete washout facility within 48 hours when it is no longer needed on the job site.

This work will not be paid for separately, but shall be incidental to the concrete work items included in the contract.


13. CONSTRUCTION CONSTRAINTS

Construction on Waveland Ave. and Grandville Ave. must commence after August 14th.

14. BRIDGE SIDEWALK AND CURB REMOVAL AND REPLACEMENT

This work consists of furnishing the labor, material, and equipment for the removal of existing PCC sidewalk and curb on the sides of a bridge and subsequent replacement of PCC sidewalk to match previous conditions.

This work shall be paid for at the contract Unit Price per **SQUARE YARD** for BRIDGE SIDEWALK AND CURB REMOVAL AND REPLACEMENT.

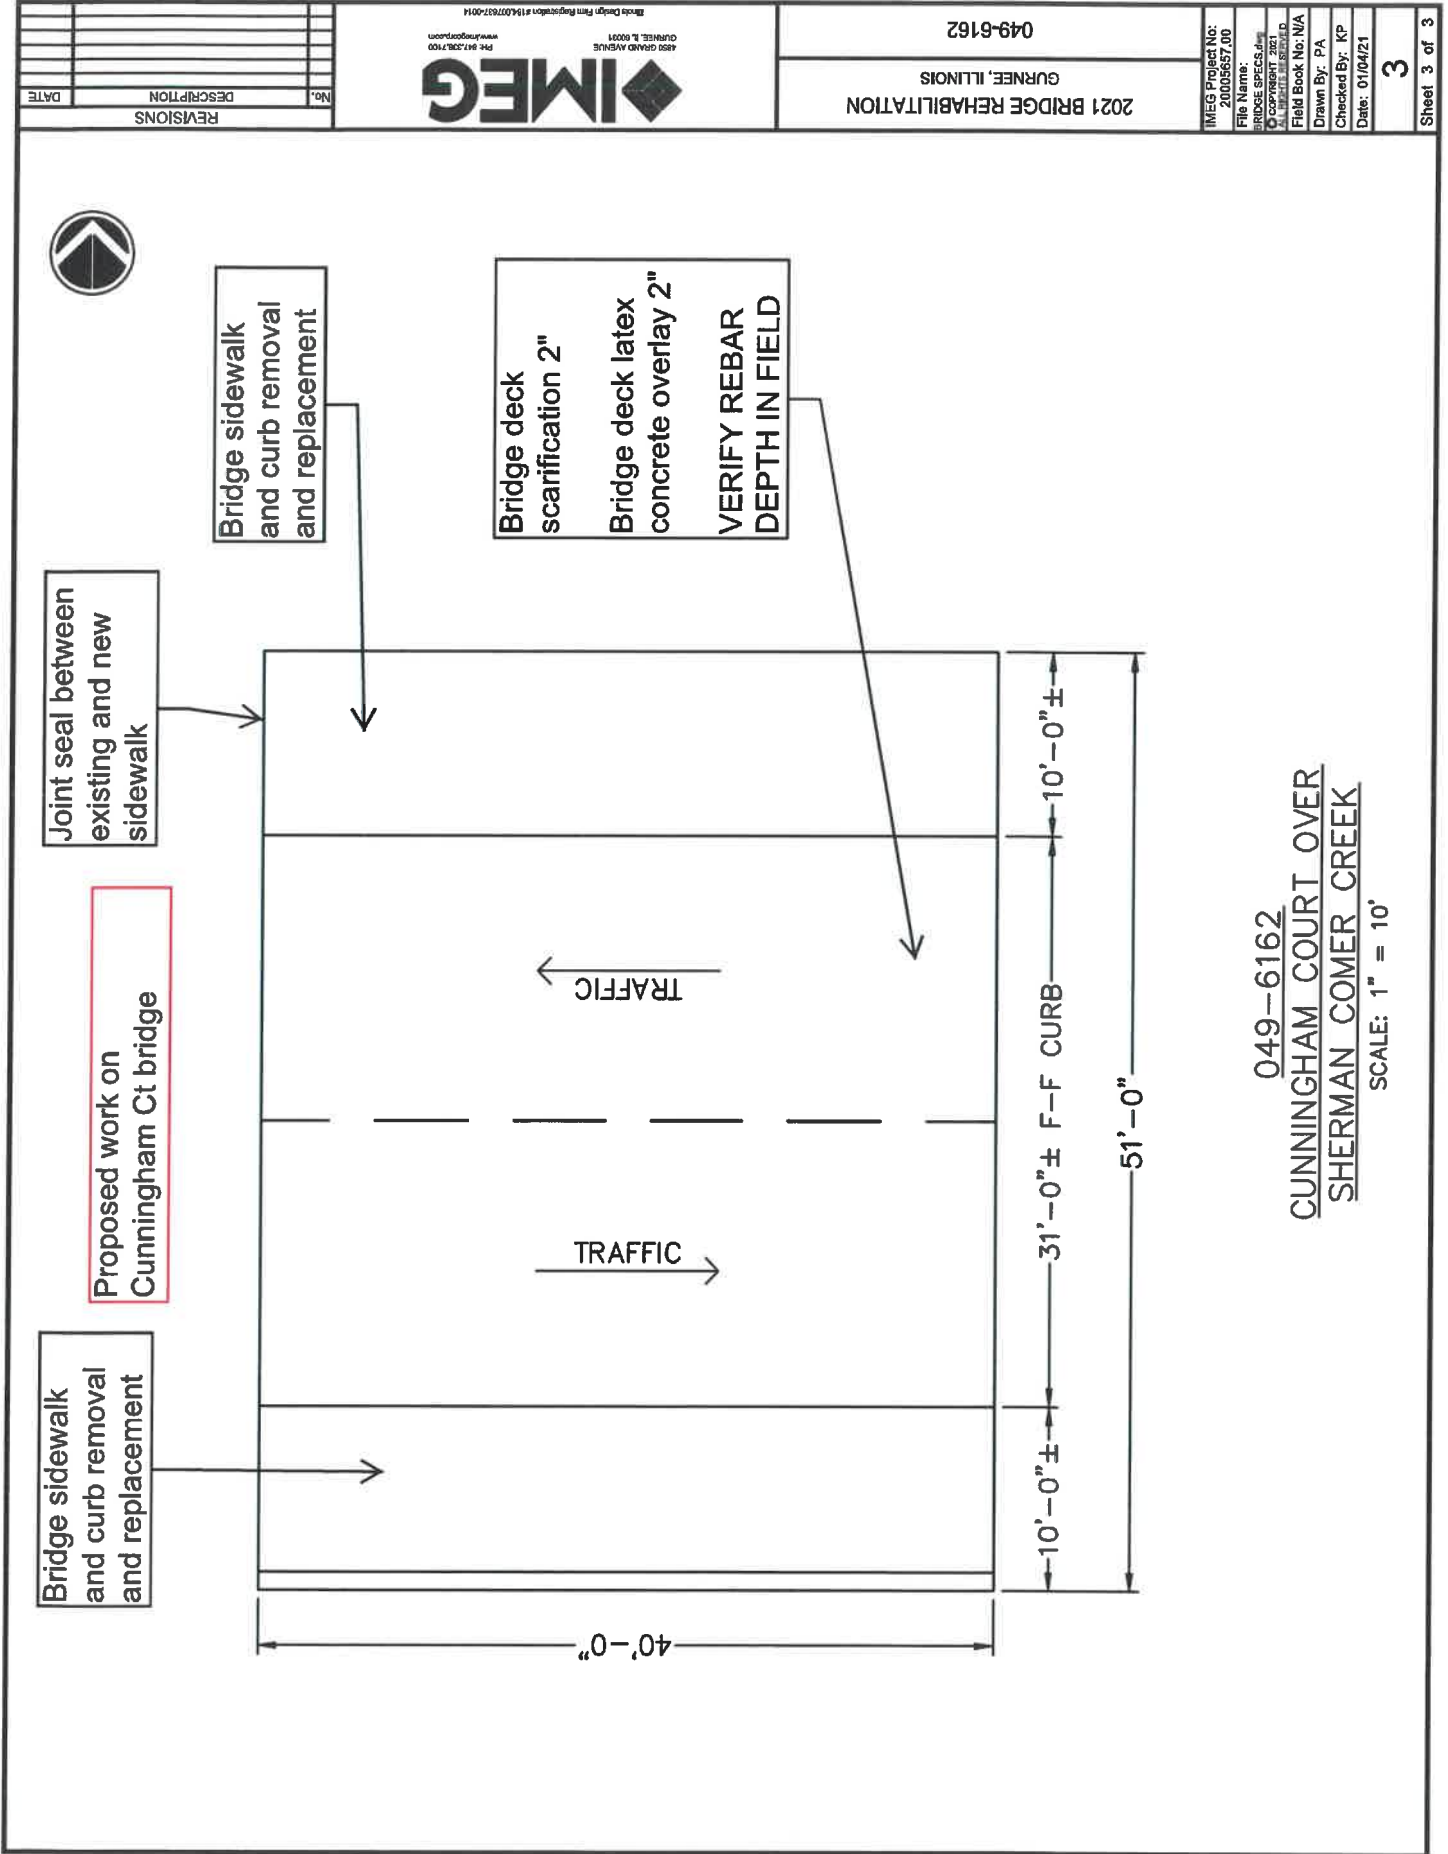

2021 BRIDGE REHABILITATION
GURNEE, ILLINOIS

049-6162




IMEG Project No: 20005657.00
File Name: BRIDGE SPEC.DWG
COPYRIGHT 2021
ALL RIGHTS RESERVED
Field Book No: N/A
Drawn By: PA
Checked By: KP
Date: 01/04/21

3
Sheet 3 of 3

REVISIONS	DESCRIPTION	DATE
No.		

Cunningham Ct Staging and Traffic Control

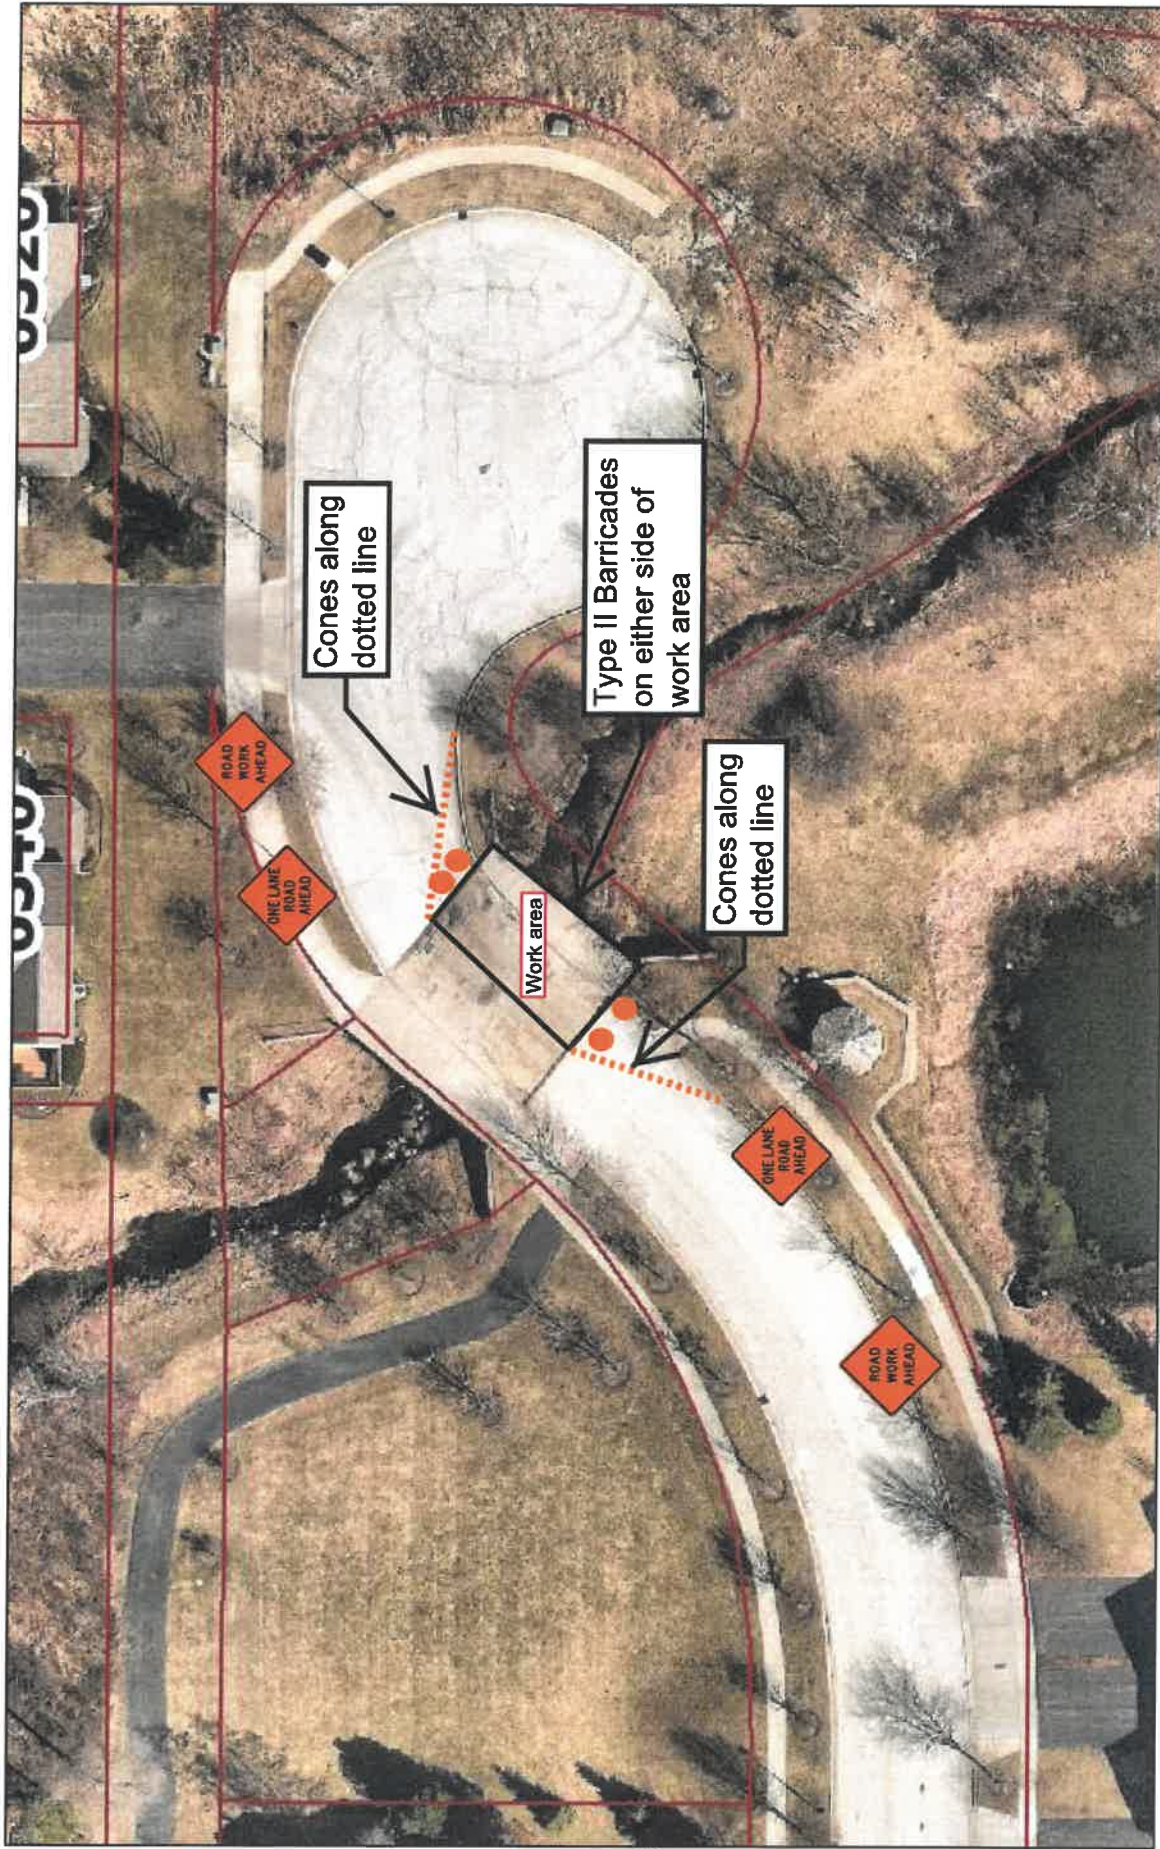

Parcel Lines



Stage 1




3/17/2023, 7:58:27 AM

This map was created for use in the Village of Gurnee GIS project. Any other use or distribution of this information is the responsibility of the user and such use is at their own risk. The Village of Gurnee disclaims all liability for any use other than Village of Gurnee business.

Scale
1:480

Cunningham Ct Staging and Traffic Control

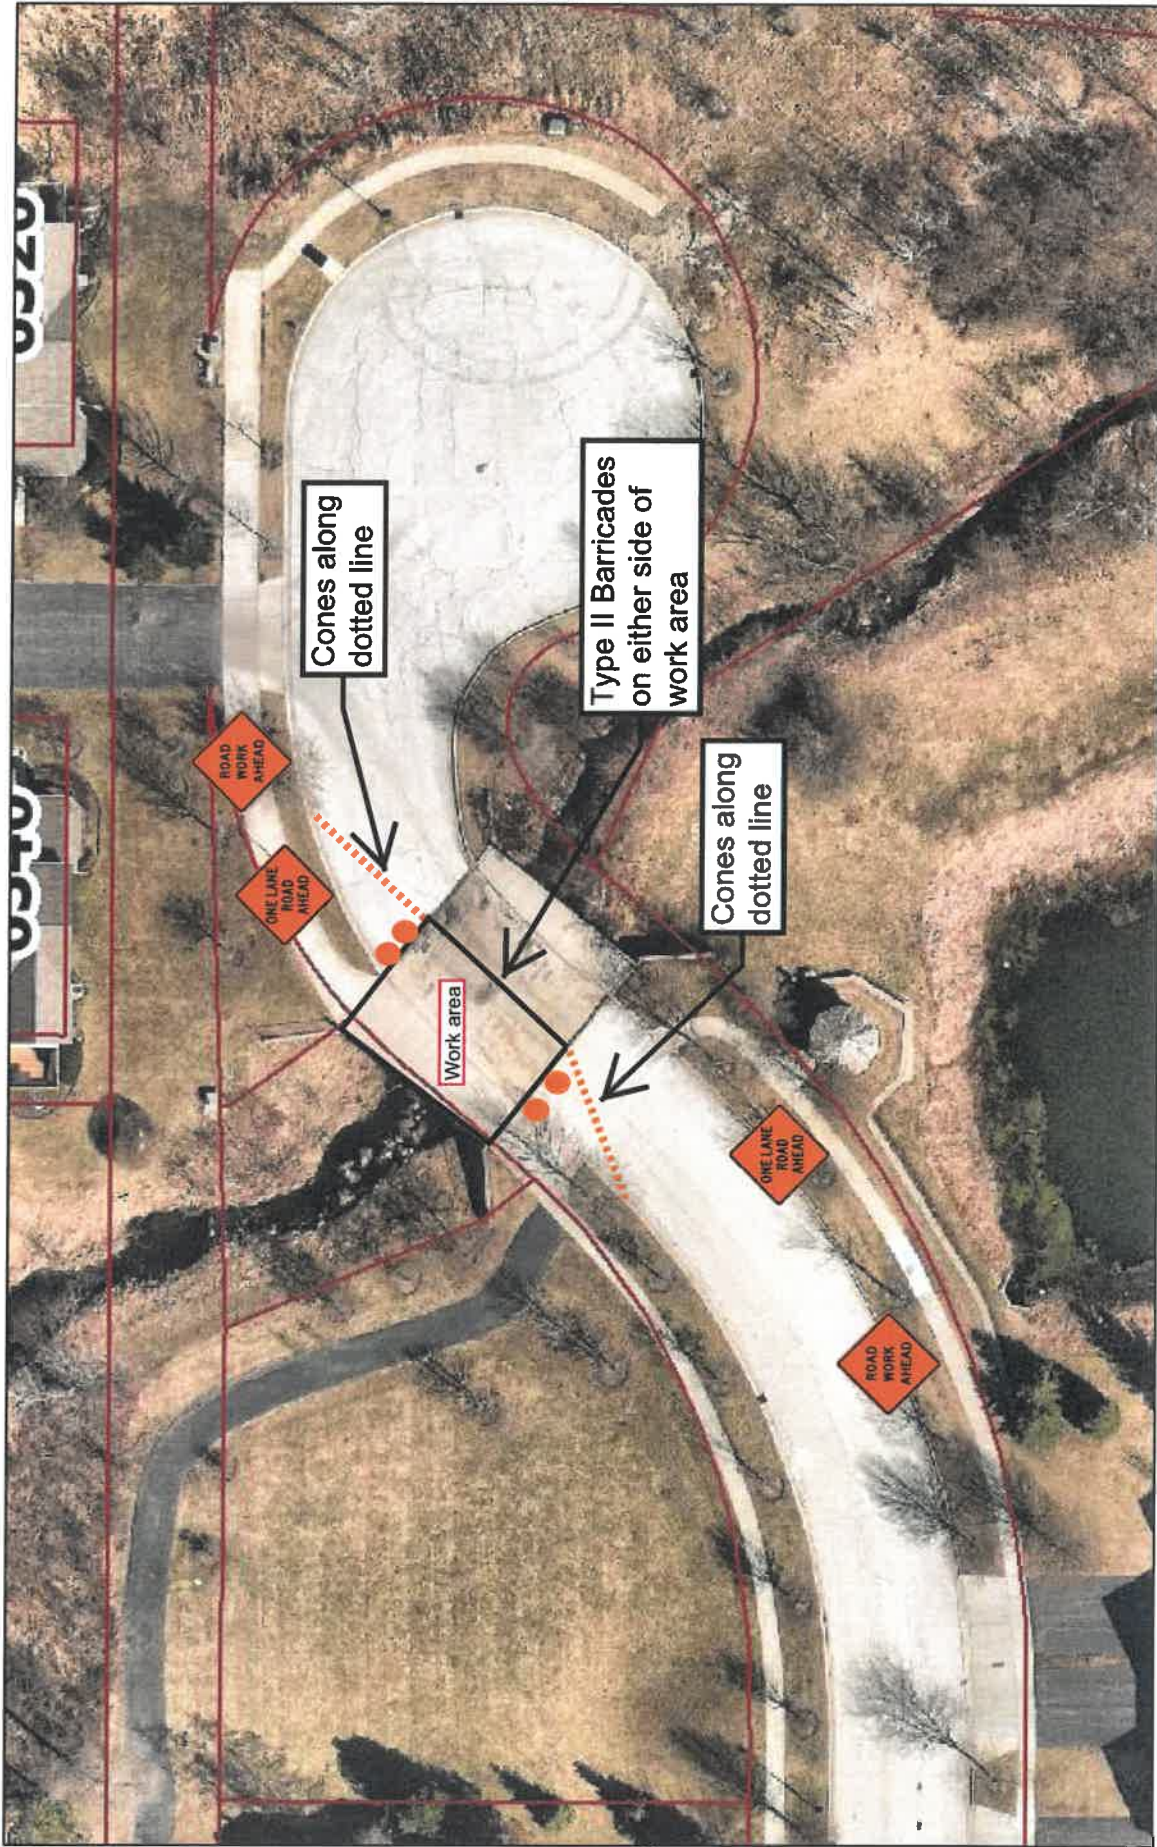

Parcel Lines

Stage 2



Scale
1:480

This map was created for use in the Village of Gurnee GIS project.
Any other use/application of this information is the responsibility of the user and such use is at their own risk.
The Village of Gurnee disclaims all liability for any use other than Village of Gurnee business.

3/17/2023, 7:58:27 AM